





## Stereo setup

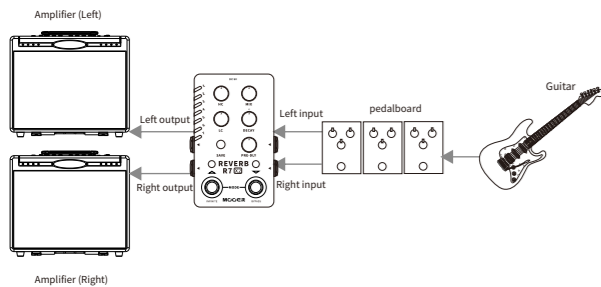

## FactoryReset

Stereo Setup with FX LOOP of amplifier

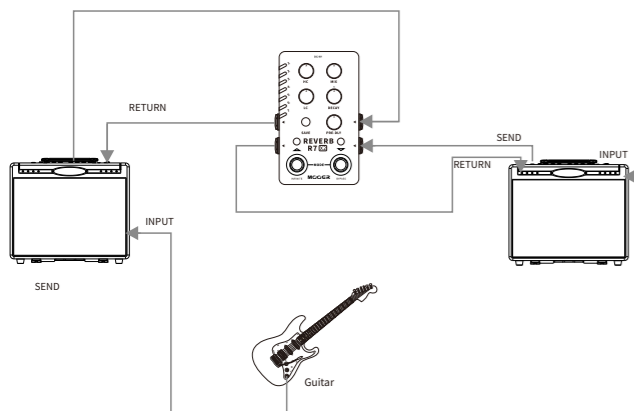

## Instructions

### 1. Select effect

(1) Normal mode. Turn on the pedal and press the SAVE button to switch between each effect.

(2) Preset rolling mode. Turn the pedal on and press TAP and BYPASS simultaneously to enter preset switching mode which will be indicated by the footswitch LED and SAVE button blinking in red. In this mode, users can roll down/up through each effect by using the TAP and BYPASS footswitches. The pedal will exit rolling mode if the pedal is idle for 3 seconds.

### 2. Preset saving

The LED indicator will blink slowly when any parameter has been changed. Users can press and hold the SAVE button to store changes. The LED indicator will blink quickly for a short duration to confirm saving. Alternatively, users can quickly press the SAVE button again to cancel those changes.

### 3. TAP TEMPO

Turn on the pedal and press the TAP footswitch several times to set up a tap tempo speed. The TAP LED indicator will show current speed by blinking.

### 4. Trail On/Off

After turning on the pedal, press and hold the BYPASS footswitch for 2 seconds. The BYPASS indicator will blink and change color to confirm. The blue LED indicates trail mode is on while Red indicates trail mode is off.

### 5. Factory reset

Unplug the power cord then press and hold the SAVE button while powering on the pedal again. The 7 LEDs will start to blink slowly. Release the SAVE button and the LED indicator will blink quickly to confirm a successful factory reset. You can unplug the power cord before releasing the SAVE button to cancel the factory reset.

\* Factory reset will clear all presets stored by user.

## Effect List

Slot	LED Color	Reverb Name	Description
1	Yellow	Room	Warm, slow, and short reverberation of a room.
2		Hall	Long and spacious reverberation of a hall.
3		Church	Solemn and splendid reverberation of a church. This reverb simulates the reverberation of an empty room with dense surface.
4		Cave	Dark and deep cave reverberation of a cave with long pre-delay. This reverb simulates the reverberation of a rock cave with irregular surface.
5		Plate	Classic clear metallic-sounding reverberation.
6		Spring	This simulates spring reverb of an old-style guitar amp.
7		Mod	Dynamic atmosphere modulated reverberation.
1	Purple	Studio	Reverberation of a small and medium-sized studio with balanced frequency response.
2		Reverse	Supernatural reverse reverberation. This reverb simulates reflection and inverted diffusion.
3		Warp	Pleasing and silvery modulated reverberation.
4		Shake	Modulated reverberation. This reverb simulates air vibration.
5		Crush	Downsampling reverberation. This reverb simulates the way of stars shining.
6		Shimmer	Broad and gorgeous octave reverberation.
7		Dream	The gentle rising feedback combined with slowly changing modulation processing creates a dreamlike atmosphere reverberation.

## Specifications

<b>Input:</b>	1/4" mono audio input jack *2 (1M ohms)
<b>Output:</b>	1/4" mono audio output jack *2 (510 ohms)
<b>Number of effect saving slots:</b>	14
<b>Power requirement:</b>	9V power supply (center negative)
<b>Current draw:</b>	300mA
<b>*Notice:</b>	Recommended to use only the original power supply included with the pedal. Using third-party power supplies may cause noise or other unexpected issues.
<b>Dimension:</b>	75x115x33mm
<b>Weight:</b>	0.334kg
<b>Accessories:</b>	Owner's manual, Power adapter

**\*Disclaimer: Parameter updates will not be notified separately.**



203050179301

**MOOER**  
www.mooeraudio.com

SHENZHEN MOOER AUDIO CO. LTD  
6F, Unit D, Jinghang Building, Liuxian 3rd Road,  
Bao'an 71 District, Shenzhen, China. 518133  
Made in China